


111 Flexible Disc Coupling

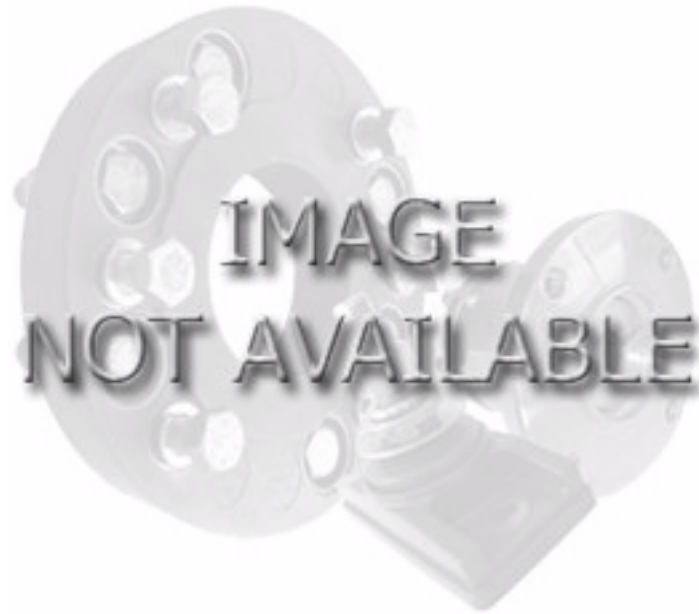

Model	PCD (F)	OD (G)	No. & Size of Bolts	Spigot (E)	Thickness (A)	Flange Dia. (C)	Flange Type	Rating (Nm)++	Weight (kg)
C#111-4-80	125mm	7 9/16"	3+3 x 1/2"	Pilot	33mm	150mm	Plain	N/A	2.35
C#111-4-90	125mm	7 9/16"	3+3 x 1/2"	Pilot	33mm	150mm	Plain	450	2.35
C#111-4-95	125mm	7 9/16"	3+3 x 1/2"	Pilot	33mm	150mm	Plain	850	2.35

80A Duro	Light Duty
90A Duro	Medium Duty
95A Duro	Heavy Duty

++ Design Torque rating (Nm) = 70% of the maximum allowable static torque (to allow for dynamic loads).

* Coupling may require a bushing kit which can be purchased as an optional extra from Poly Flex.

CNC Machined T-Bushes are available to suit various flanges.

