


Barflex PVC Suction Hose

Barfell Product Code	Nominal in mm's		Vacuum Rating KPa/20°C	Working Pres. @ 20°C		Weight Kg/m	Min Bend Radius in mm	Coil Lengths in Metres
	I.D.	O.D.		Mpa	P.S.I.			

GREY HD GENERAL PURPOSE

A heavy duty suction/discharge hose. It is strong and durable with a rigid PVC spiral. Mirror smooth bore for increased pumping and pumping efficiency.

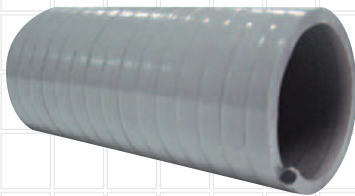

206100	25.2	31.4	-90.0	1.0	145	0.38	120	20
206110	31.8	38.6	-90.0	0.9	130	0.51	150	20
206120	38.4	45.6	-90.0	0.8	115	0.67	200	20
206125	44.4	52.6	-90.0	0.7	100	0.83	240	20
206130	50.8	59.6	-90.0	0.7	100	1.03	270	20
206140	63.7	73.3	-90.0	0.6	85	1.45	330	20
206150	76.0	88.0	-90.0	0.6	85	2.25	440	20
206160	102.2	116.0	-90.0	0.5	75	3.04	620	20
206170	127.8	143.0	-90.0	0.5	75	4.16	860	20
206180	150.0	170.0	-90.0	0.3	45	6.46	1,100	20

Applications Conveyance of water, slurries, sludge, waste matter, some chemicals, granules, sand & gravel. Widely used in the general manufacturing and building industries.


Colour Grey
Temperature Range -5°C to +60°C

Chemical Resistance Good
Flexibility Good

Weathering Properties Good
Abrasion Resistance Excellent

BLACK HD GENERAL PURPOSE

A heavy duty suction/discharge hose. It is strong and durable with a rigid PVC spiral. Mirror smooth bore for increased pumping and pumping efficiency. Black colour gives improved UV resistance.

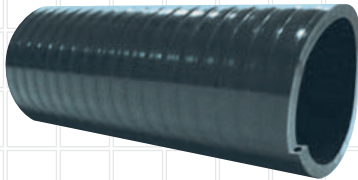

207492	25.2	31.4	-90.0	1.0	145	0.38	120	20
207494	31.8	38.6	-90.0	0.9	130	0.51	150	20
207496	38.4	45.6	-90.0	0.8	115	0.67	200	20
207498	50.8	59.6	-90.0	0.7	100	1.03	270	20

Applications Conveyance of water, slurries, sludge, waste matter, some chemicals, granules, sand & gravel. Widely used in the general manufacturing and building industries.

Colour Black
Temperature Range -5°C to +60°C

Chemical Resistance Good
Flexibility Good

Weathering Properties Excellent
Abrasion Resistance Excellent

SUPER 'E' HD PETROL & OIL

An extremely flexible, thick walled suction/delivery hose with outstanding resistance to hydrocarbon based chemicals, including diesel fuel, petrol, fuel oil greases and lubricants. Smooth bore ensures maximum pumping efficiency.



206800	25.2	34.0	-90.0	0.7	100	0.55	80	20
206810	31.8	41.0	-90.0	0.7	100	0.70	120	20
206820	38.4	48.0	-90.0	0.6	85	0.87	180	20
206830	50.8	62.0	-90.0	0.5	75	1.33	220	20
206840	63.7	76.0	-90.0	0.5	75	1.81	270	20
206850	76.0	90.0	-90.0	0.5	75	2.44	350	20
206860	102.2	117.0	-90.0	0.4	60	3.41	550	20
206880	150.0	170.0	-90.0	0.35	52	6.73	980	Made to order

Applications Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Colour Dark Blue
Temperature Range -5°C to +60°C

Chemical Resistance Excellent
Flexibility Excellent

Weathering Properties Good
Abrasion Resistance Excellent

Custom Lengths Available

Product Specifications may Change without Notice

R ~ Reels & S ~ Spools