


Barflex PVC Suction Hose

Barfell Product Code	Nominal in mm's		Vacuum Rating KPa/20°C	Working Pres. @ 20°C		Weight Kg/m	Min Bend Radius in mm	Coil Lengths in Metres
	I.D.	O.D.		Mpa	P.S.I.			

An extremely flexible suction/discharge hose with a hard wearing exposed rigid PVC spiral. Excellent chemical resistance, making the hose suitable for diesel fuels petrol, oils, sewage and chemicals.

TIGERTAIL HD PETROL & OIL

206045	44.5	55.5	-80.0	0.3	45	0.64	180	20
206060	50.8	61.0	-80.0	0.3	45	0.88	220	20
206065	63.7	77.0	-80.0	0.3	45	1.27	270	20
206070	76.0	91.0	-80.0	0.3	45	1.62	350	20
206075	102.0	118.0	-80.0	0.3	45	2.43	450	20
206080	127.8	149.0	-80.0	0.3	45	3.99	475	20
206085	150.0	172.0	-80.0	0.3	45	5.10	500	20
206090	200.0	224.0	-80.0	0.3	45	7.55	650	Made to order

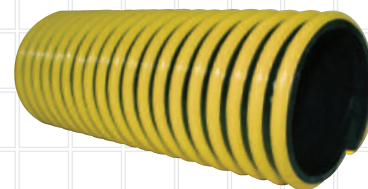

Applications Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Colour Black with Exposed Yellow Spiral
Temperature Range -5°C to +60°C


Chemical Resistance Flexibility Excellent
Excellent

Weathering Properties Good
Abrasion Resistance Excellent

A medium duty chemical suction/discharge hose. Extremely flexible and lighter weight product for the less demanding applications.

BLACK BOSS MD PETROL & OIL

206380	19.3	24.9	-90.0	0.65	95	0.26	40	20
206382	25.2	32.0	-90.0	0.65	95	0.41	65	20
206384	31.8	39.0	-90.0	0.65	95	0.54	100	20
206386	38.4	46.2	-90.0	0.55	80	0.70	150	20
206388	50.8	60.0	-90.0	0.45	65	1.07	190	20
206390	63.7	74.1	-90.0	0.45	65	1.50	230	20
206392	76.0	89.0	-90.0	0.45	65	2.25	330	20
206393	102.2	116.0	-90.0	0.40	60	3.04	520	20

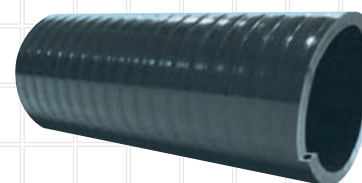

Applications Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Colour Black
Temperature Range -5°C to +60°C

Chemical Resistance Flexibility Excellent
Excellent

Weathering Properties Good
Abrasion Resistance Good

Medium duty flexible PVC suction/discharge hose. Good resistance to chemicals and oil. Highly flexible at low temperatures and a mirror smooth bore for pumping efficiency.

BLUELINE OIL & TANKER

206903	25.2	32.0	-90.0	1.0	145	0.41	65	20
206905	31.8	39.0	-90.0	0.9	130	0.54	100	20
206907	38.4	46.2	-90.0	0.9	130	0.70	150	20
206910	50.8	60.0	-90.0	0.7	102	1.07	190	20
206912	63.7	74.1	-90.0	0.6	87	1.50	230	20
206914	76.0	89.0	-90.0	0.6	87	2.25	330	20
206916	102.2	116.0	-90.0	0.5	72	3.04	520	20



Applications Collection of waste on environmental waste trucks, pumping the contents of grease pits, sewage collection, pumping of fuels, lubricants and most chemicals.

Colour Blue
Temperature Range -5°C to +60°C

Chemical Resistance Flexibility Excellent
Excellent

Weathering Properties Good
Abrasion Resistance Good

Custom Lengths Available

Product Specifications may Change without Notice

R ~ Reels & S ~ Spools