


Barflex PVC Suction Hose

Barfell Product Code	Nominal in mm's		Vacuum Rating KPa/20°C	Working Pres. @ 20°C		Weight Kg/m	Min Bend Radius in mm	Coil Lengths in Metres
	I.D.	O.D.		Mpa	P.S.I.			

WINE FOOD & BEVERAGE




Heavy duty flexible food quality PVC suction/discharge hose reinforced with a rigid spiral. Has a smooth bore to minimise flow losses and is UV light resistant.

206500	25.2	34.0	-90.0	0.7	100	0.60	160	20
206510	31.8	41.0	-90.0	0.7	100	0.71	190	20
206520	38.4	48.0	-90.0	0.6	85	0.82	230	20
206530	50.8	62.0	-90.0	0.5	75	1.20	290	20
206540	63.7	76.0	-90.0	0.5	75	1.73	360	20
206550	76.0	90.0	-90.0	0.5	75	2.29	450	20
206560	102.2	117.0	-90.0	0.4	60	3.33	640	20
206570	127.8	143.0	-90.0	0.4	60	4.58	900	Made to order
206580	150.0	170.0	-90.0	0.35	50	6.75	1,200	Made to order

Applications Suitable for the wine, canning and food packaging industries. It can be used for the suction of wine & spirits up to 28 1/4 proof. The smooth bore enables easy cleaning and reduces bacteria buildup.

Colour Clear with Claret Spiral	Chemical Resistance Excellent	Abrasion Resistance Excellent
Temperature Range -5°C to +60°C	Flexibility Good	Conforms to Australian Standard AS2070, European Standard EU2002-72-EC, certified phenol free.

C VIEW S

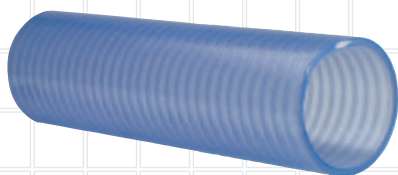


An exceptionally flexible, clear suction/discharge hose suitable for food and beverages. The clear rigid helix makes the hose completely transparent. It is UV light resistant and conforms to AS2070 1999 and EU2022-72-EC.

206482	25.0	32.0	-90.0	1.0	145	0.43	120	20
206484	32.0	39.6	-90.0	0.9	130	0.65	150	20
206486	38.0	45.8	-90.0	0.9	130	0.70	200	20
206488	50.8	60.2	-90.0	0.7	102	1.05	270	20
206490	63.5	73.5	-90.0	0.6	87	1.44	330	20
206492	76.2	87.8	-90.0	0.6	87	1.98	440	20
206494	101.0	114.4	-90.0	0.5	73	3.14	620	20

Applications Suction of any fluid that requires a food grade hose including wineries, milk collection or processing, canneries, and food processing plants. It can be used for the suction or delivery of wine & spirits to 28 1/4 proof.

Colour Clear with Clear Rigid PVC Spiral	Chemical Resistance Excellent	Abrasion Resistance Good
Temperature Range -5°C to +60°C	Flexibility Excellent	Conforms to Australian Standard AS2070, European Standard EU2002-72-EC, certified phenol free.

C VIEW SP

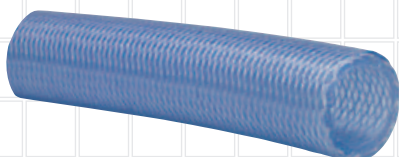

Specifically designed to outperform all other hoses in the beverage industry. It is both a suction and pressure hose in one. It is UV light resistant, conforms to AS2070 and EU2022-72-EC for use with food products and uses a plastic helix that will not rust or cut the hands of operators.

206000	25.0	35.4	-90.0	1.2	175	0.68	130	30
206005	38.0	49.9	-90.0	1.2	175	1.01	220	30
206010	51.0	64.4	-90.0	1.0	145	1.67	300	30
206012	76.2	92.4	-90.0	1.0	145	2.57	490	20

Applications Pressure or suction of any liquid or semi liquid that requires a food grade hose. Included are wineries, milk processing plants or tankers. Can be used with wine and spirits to 28 1/4 proof.

Colour Clear with Clear Rigid PVC Spiral	Chemical Resistance Excellent	Abrasion Resistance Excellent
Temperature Range -5°C to +60°C	Flexibility Excellent	Conforms to Australian Standard AS2070, European Standard EU2002-72-EC, certified phenol free.

Custom Lengths Available

Product Specifications may Change without Notice

R ~ Reels & S ~ Spools