

Barflex PVC Suction Hose


Barfell Product Code	Nominal in mm's		Vacuum Rating KPa/20°C	Working Pres. @ 20°C		Weight Kg/m	Min Bend Radius in mm	Coil Lengths in Metres
	I.D.	O.D.		Mpa	P.S.I.			

A general purpose suction/discharge hose for the transfer of food products, including beer, wine, drinking water and milk. Resistant to chemicals used in cleaning and is UV light resistant.

STD FOOD

CONTACT MILK TANKER

206400	25.2	32.0	-90.0	0.7	100	0.41	120	20
206410	31.8	39.0	-90.0	0.7	100	0.52	150	20
206420	38.4	46.2	-90.0	0.6	85	0.68	200	20
206430	50.8	60.0	-90.0	0.5	75	1.02	270	20
206440	63.7	74.3	-90.0	0.5	75	1.40	330	20
206450	76.0	89.0	-90.0	0.4	60	2.01	440	20
206460	102.2	116.0	-90.0	0.4	60	3.06	620	20

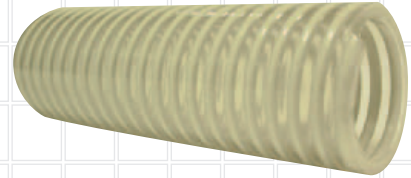

Applications Suitable for the tanker delivery of milk, other dairy products, drinking water, wine and other food products. The smooth bore enables easy cleaning and reduces bacteria buildup.


Colour	Clear with Bone Rigid PVC Spiral	Chemical Resistance	Good	Abrasion Resistance	Good
Temperature Range	-5°C to +60°C	Flexibility	Excellent	Conforms to	Australian Standard AS2070, European Standard EU2002-72-EC, certified phenol free.

An extremely flexible hose with outstanding abrasion resistance due to the inclusion of urethane rubber. Barfell's latest and best hose for seeding equipment, soil and rock removal on vacuum diggers and street sweepers and any particulate collection in extreme environments.

ABRASION RESISTANT

URETHANE SUCTION HOSE

206684	32	41.5	-90	0.3	0.39	250	20
206686	38	48.4	-90	0.3	0.45	310	20
206690	50	64.5	-80	0.3	0.76	350	20
206691	63	77.0	-70	0.3	1.46	370	20
206692	75	95.0	-70	0.3	1.77	400	20
206693	102	118.0	-70	0.3	3.48	500	20
206694	127	150.0	-70	0.3	5.70	550	20
206695	150	174.0	-60	0.3	6.63	600	10, 20
206696	203	224.0	-60	0.3	10.59	650	10

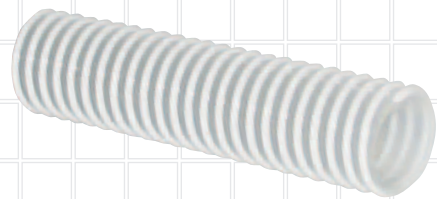

Colour	Clear with White Rigid Spiral	Chemical Resistance	Excellent	Abrasion Resistance	Excellent
Temperature Range	-5°C to +60°C	Flexibility	Excellent	Weathering Properties	Excellent

A heavy duty suction/discharge hose especially formulated to be hard wearing and resistant to abrasion. A flexible thick PVC/Nitrile blend with an external rigid PVC spiral results in a hose with exceptional wear resistance, both inside and out, and flexibility for ease of use.

GREENLINE ABRASIVE RESISTANT

206632	32.0	40.5	-90.0	0.3	40	0.55	250	20
206634	38.4	48.4	-90.0	0.3	40	0.65	280	20
206636	44.5	57.0	-80.0	0.3	40	0.75	310	20
206638	50.8	63.0	-80.0	0.3	40	0.88	350	20
206640	63.7	79.0	-70.0	0.3	40	1.34	370	20
206642	76.0	92.5	-70.0	0.3	40	1.60	400	20
206644	102.2	118.0	-70.0	0.3	40	2.40	500	20
206645	127.8	149.8	-70.0	0.3	40	4.75	550	20
206648	150.0	174.0	-60.0	0.3	40	5.96	600	20
206650	203.0	225.0	-60.0	0.3	40	7.55	650	10



Applications Pumping slurries, air seeder machines, industrial/commercial vacuum cleaning.

Colour	Black with Green Rigid Spiral	Chemical Resistance	Excellent	Abrasion Resistance	Excellent
Temperature Range	-5°C to +60°C	Flexibility	Excellent	Weathering Properties	Excellent

Custom Lengths Available

Product Specifications may Change without Notice

R ~ Reels & S ~ Spools