

Barfell Product Code	Nominal O.D.	Nominal Wall Thickness	Working Pres. @ 20°C		Weight Grams/m	Coil Lengths in Metres
			Mpa	P.S.I.		

Nylon pressure tubing is made from premium quality raw materials and precision engineered to ensure simplicity of connections with fittings and adaptors.

NYLON

Flexible Metric

205500	4mm	0.70 mm	2.0	290	7.6	100
205505	5mm	0.85 mm	2.0	290	11.8	100
205510	6mm	1.0 mm	2.0	290	16.6	100
205515	8mm	1.4mm	2.0	290	30.9	100
205520	10mm	1.7mm	2.0	290	47.2	100
205525	12mm	2.0 mm	2.0	290	66.8	100

Flexible Imperial

205530	1/8"	0.019"	1.7	250	4.4	100
205535	3/16"	0.031"	1.7	250	10.0	100
205540	1/4"	0.040"	1.7	250	17.7	100
205545	5/16"	0.049"	1.7	250	26.9	100
205550	3/8"	0.058"	1.7	250	39.7	100
205555	1/2"	0.076"	1.7	250	68.6	100
205560	5/8"	0.065"	0.9	125	80.4	100
205565	3/4"	0.080"	0.9	125	117.1	100

Semi Rigid Imperial - Black Only


205600	3/16"	0.039"	4.3	625	12.5	100
205605	1/4"	0.050"	4.3	625	21.6	100
205610	5/16"	0.062"	4.3	625	33.8	100
205615	3/8"	0.074"	4.3	625	48.5	100
205620	1/2"	0.097"	4.3	625	87.1	100

Self Store

205000	6	0.8	1.2	174	20.5	30
205005	10	1.1	1.2	174	39.5	30
205010	12.5	1.6	1.2	174	77.2	30



Wall Available in Black and Natural (Translucent)

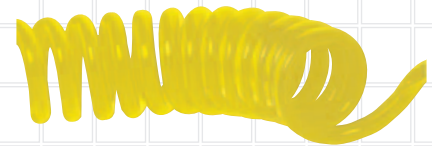

Wall Available in Yellow

Applications Pneumatic and hydraulic control systems, fuel tubing, air and gas tubing. Also ideal for handling weed killing solutions, refrigerants, fresh and sea water, fumigants, paints and lacquers and many other products.

Custom Lengths Available

Product Specifications may Change without Notice

R ~ Reels & S ~ Spools