

CONTAINER RAMPS


CR6 & CR8 Container Ramps

- The CR series is designed primarily for bridging into a standard container from ground level
- The CR ramp can also be used for vehicle loading from a raised dock
- The self levelling lip allows for full load capacity when on slightly uneven ground.

Features	Specifications
Capacity	6000kg
Size	2000mm
Width	2200mm
Weight	330kg

CR8

Features	Specifications
Capacity	8000kg
Size	2000mm
Width	2200mm
Weight	400kg

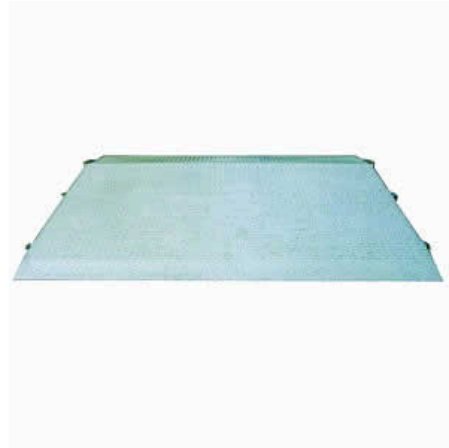

CRL6 Container Ramps

- Ideal for removing the first pallets from a container
- Fork Pockets on either side of the ramp, along with flip up front pockets
- Fitted with securing chains prevent disengagement from the container during use.
- Painted finish.

Features	Specifications
Capacity	6000kg
Size	3000mm
Width	2200mm
Weight	500kg



CRSN8 Container Ramp

Fast positioning and removal with the CRSN8 ramp.

Fitted with fork pockets either side, along with front flip-ups allows placement in confined areas.

Securing safety chains both sides for connection of the ramp to the container.

Raised side plates prevent the forklift from driving off the side.

Full gusseting under eliminates fatigue of the tread plate decking.



SPECIFICATIONS:

- Size 1.8m Long x 2.32m Wide x 160mm High (ground to ramp deck)
- Structural Capacity 8000kg SWL
- Unit Weight 440kg * Enamel Paint Finish