


Oroflex Bandama

Applications

Delivery of water in self-propelled machines for irrigation tractor drag) Delivery of liquid fertilisers (sludge type) Irrigation guns Installations in high abrasion conditions Front and side pivots

Characteristics

Colour: Black. Composition: Synthetic rubber and Polyester-Polyamide textile.
 Surface: Fine ribbed. Service Temperature: >From -20 °C to + 80 °C Lengths Available: Up to 200 m.

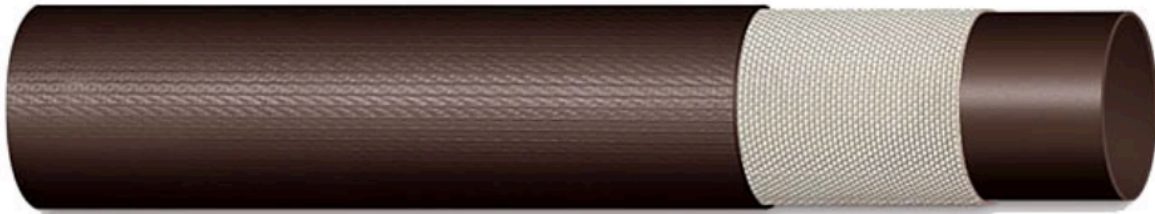

Code	Ø mm	Ø ins	Wall Thickness	Weight Mtr gms	Service Burst Pressure Bar	Traction Limit No Tear	Curve Radius Mtrs
01310	65	2 1/2	4,5	850	15 / 45	3.100	1,200
01311	76	3	4,5	1.100	15 / 45	4.700	1,400
01312	90	3 1/2	4,5	1.300	15 / 45	5.300	1,500
01313	102	4	4,5	1.500	10 / 30	7.000	1,500
01314	115	4 1/2	4,5	1.600	10 / 30	10.200	1,700
01315	127	5	4,5	1.850	10 / 30	12.500	1,700
01316	152	6	4,5	2.100	10 / 30	17.600	1,900