




T.P.R.D (THERMO PLASTIC RUBBER DUCTING)

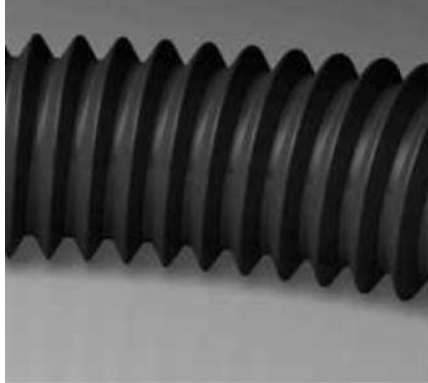

Colour / Black
 Temperature Range / -50 °C to 100 °C
 Material / UV Resistant Rubber

PRD is constructed from a Thermo Plastic Rubber compound with a wire helix reinforcement. An excellent general purpose ducting with good abrasive qualities and UV resistance.

NOM LD (MM)	NOM LD (INCHES)	MIN. BEND RADIUS (MM)	NOM WALL	COIL LENGTH (M)
51	2	102	0.5	10
57	2.25	114	0.5	10
63	2.5	126	0.5	10
76	3	152	0.5	10
83	3.25	166	0.5	10
89	3.5	178	0.5	10
102	4	204	0.5	10
114	4.5	228	0.5	10
127	5	254	0.5	10
152	6	304	0.5	10
178	7	356	0.5	10
203	8	406	0.5	10
229	9	458	0.5	10
254	10	508	0.5	10
280	11	560	0.5	10
305	12	610	0.5	10
356	14	712	0.5	5
381	15	762	0.5	5
406	16	812	0.5	5
457	18	914	0.5	5
508	20	1016	0.5	5
559	22	1118	0.5	5
600		1220	0.5	5

Sizes from 356mm to 600mm manufactured to order.