




# 9000W Petrol Powerlite Generator - PH110ET Powered by Honda

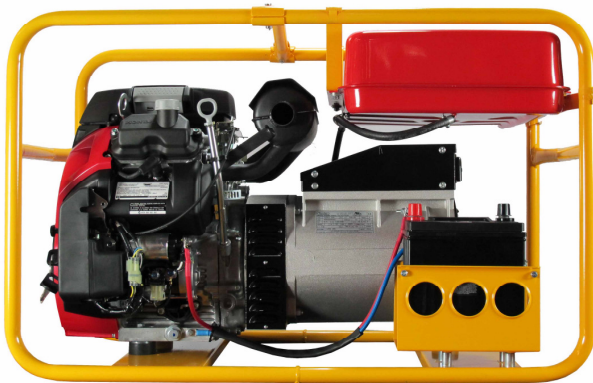

PH110ET23000



PH110ET14000

## Model - PH110ET

### Product Description

9,000W Petrol Powerlite Generator, powered by Honda with electric start and long range fuel tank. Its range of uses includes powering portable electric tools, 200 Amp welder (on general cycle 2.5mm rods), shearing plant, air compressor (with engine motor up to 3kW), heaters, lights, and appliances. It also features excellent motor starting and welder performance, provided that the total power consumption at any one time is less than 9,000W.

### Specifications

Industry rating	11 kVA
Real Power	9000 watts
Engine	GX630 Honda
Starting	Electric
Phase	Single
Fuel	Petrol
Frame	Roll
Tank Litres	18
Fuel litres per hour	4.8
Weight	102 kg
Outlets	2x15A
Dimensions (LxWxH mm)	850x500x600

Options	PH110ET	PH110ET13000	PH110ET14000	PH110ET20000	PH110ET23000	PH110ET24000
Recoil	✗	✗	✗	✗	✗	✗
Electric (Battery Optional)	✓	✓	✓	✓	✓	✓
25mm Scoop Frame	✓	✓	✓	✗	✗	✗
RCD Protection	✗	✓	✓	✗	✓	✓
2 x IP66 Outlets	✗	✗	✓	✗	✗	✓
Wheel and Handle Roll Frame	✗	✗	✗	✓	✓	✓

**Powerlite**  
POWER • LIGHTING • TRAFFIC

P 02 9912 5000 F 02 9912 5001 E [sales@powerlite.com.au](mailto:sales@powerlite.com.au) W [powerlite.com.au](http://powerlite.com.au)  
2 Binney Road, Kings Park NSW 2148

